


FARM-AID

Get your own Limited Edition

FERGUSON TRACTORS
1944 Instruction Book



WE SUPPLY:

Animal Traps
Carryalls
Chaff Cutters
Cultivators
Diesel Transfer Units
Farm Workshop Accessories
Grader Blades
Grain Handling Equipment
Material Handling Equipment
Harrows
Linkage Scoops
Livestock Equipment
Mulchers
Pendulum & Spinner Broadcasters
Ploughs
Post Borers
Post Drivers
Post Hole Diggers
Pumps
Rear End Loaders
Rippers
Seeders
Slashers
Spraying Equipment
Spreaders
Stick Rakes
Tools
Tractor Parts & Accessories



Aerator


Used to aerate the soil to reduce compaction and allows water and fertiliser to penetrate the soil. Suitable for pastures, ovals and playing fields. Custom made sizes and configurations can be manufactured to suit your requirements.

Features

- Heavy Duty 100 x 16 Headstock
- 75 x 50 x 6mm RHS Main Frame
- Self Aligning Pillow Flange Bearings
- 1 1/4" Axles
- 14" (355mm) diameter heavy tubular roller
- 5 rows of 150mm tines spaced 12" apart
- Can be filled with water for extra weight
- Cat 1 or Cat 2 Pins

Models

FA1000 - 4' (1200mm)	FA1004 - 8' (2400mm)
FA1001 - 5' (1500mm)	FA1005 - 9' (2700mm)
FA1002 - 6' (1800mm)	FA1006 - 10' (3000mm)
FA1003 - 7' (2100mm)	

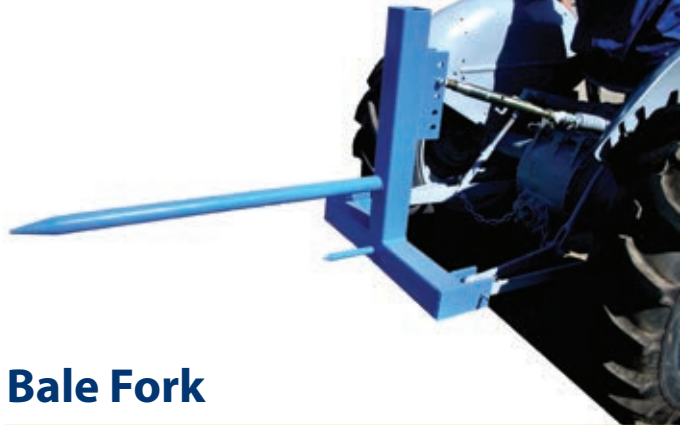


Bale Fork

The Farm-Aid Bale Forks are Heavy Duty Category 1 or 2 and are manufactured in Queensland.

Models

FA1015 - Two Spikes

FA1016 - One Spike

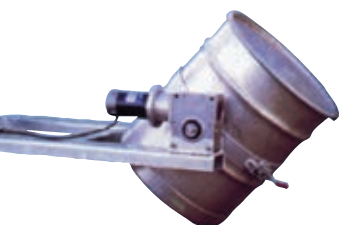

Drum Lifters

Features

- The ideal fork lift attachment
- Reduces risk of injury through manual handling
- Reduces risk of waste and spillages of contents

Models

FA1013 - Manual

FA1014 - Hydraulic



Carryalls

Any configuration can be made to specification.

Models

FA500 - 6' x 3'6" Dressed Hardwood floor (116kg)

FA501 - 6' x 3'6" Steel floor (125kg)

FA502 - 5' x 2'6" Dressed Hardwood floor (106kg)

FA503 - 4' x 3' Dressed Hardwood floor (85kg)

FA504 - 3' x 2' Dressed Hardwood floor (60kg)





Coil-Tine Toolbar Tillers

Features

- Heavy Duty Headstock
 - Solid 5cm² toolbar (1045 High Tensile Grade)
 - 2.5cm² Coil Tines
 - Clamps, Wedges
 - Fitted with points or sweeps
- Assemblies can be made to custom specification.

Models

Single Toolbar			
Code	Cut	Tines	Weight
FA300	3'0" (.92m)	3	90kg
FA301	4'0" (1.2m)	4	110kg
FA302	5'6" (1.65m)	5	136kg
FA303	7'6" (2.25m)	7	170kg
Double Toolbar			
FA304	5'6" (1.65m)	9	236kg
FA305	7'6" (2.25m)	9	300kg
FA306	10' (3.0m)	11	371kg
FA307	10'6" (3.15m)	15	400kg

Dolomite & Fertiliser Dropper

Features

- Ground Wheel Drive
- 3 Point Linkage Mount
- Adjustable hole openings and agitator to ensure free flow of fertilizer or lime
- Optional trailing models made to order

Models

- FA850 - 3' Hopper Mini - 900mm
- FA851 - 4' Hopper Junior - 1200mm
- FA852 - 6' Hopper Standard - 1800mm
- FA853 - 8' Hopper Large - 2400mm
- FA854 - 10' Hopper Extra large - 3000mm
- FA855 - Drawbar (Manufacturing Option)



Disc Hiller

Models

Disc Hillers

- FA800 - 13" with 1 1/4" Round Shank - Bare
- FA801 - 13" with 1 1/4" Round Shank + clamp & wedge
- FA802 - 20" with 2" Round Shank + clamp & wedge
- FA807 - 22" with 2" Round Shank + clamp & wedge

Toolbar

- FA311 - 2" Toolbar Hi-Tensile Bar
(per metre as ordered)

Furrowers

- FR9312 - 12" Bare
- FR9315 - 15" Bare
- FR700 - 20" Bare

Bed maker Assys

- FA803 - 6' Toolbar, Light Duty Headstock, 2 x 13" Disc Hillers + clamps & wedges
- FA804 - 6' Toolbar, Light Duty Headstock, 2 x 20" Disc Hillers + clamp & wedges





Flame Gun

The ultimate way to eradicate unwanted and noxious weeds along with other parasites without using potentially dangerous chemicals.

With a core temperature of 1090°C it destroys top growth weeds, seeds and harmful bacteria thereby sterilising the soil and leaving a potash rich residue for future plantings.

It is used for sterilising seed beds prior to planting, and for ground clearing under trees and fences, and is great for inter-row weeding. *A separate trolley hood is available as an option.*

It can also be used around the home to kill weeds that pop up between pavers and concrete. Other uses for the flame gun are killing off lice and mites in chook sheds and also destroying rotting fruit on the ground to reduce fungal and potentially harmful spore germination.

Features

- Weighs only 7.5kg when filled with kerosene.
- Ergonomic and easy to carry
- Easy to operate

Models

X300

X500 - Trolley and Hood

Headstocks

3 PT Linkage A-Frame for trailer

The ideal solution to towing a standard trailer with your tractor. Drawbar & towball optional extras.

Features

- 50 x 10mm flat bar

Model

FA313 - 50 x 10mm

FA312 - Includes towball



3 PT Linkage Light Duty Headstock

Features

- 90 x 10mm flat bar
- Complete with wedges & bottom linkage pins

Model

FA309 - 90 x 10mm



3 PT Linkage Heavy Duty Headstock

Features

- 100 x 16 flat bar
- Complete with wedges & bottom linkage pins

Model

FA308 - 100 x 16mm





S-Tine Cultivator

Features

- Light duty 90 x 10mm Headstock
- Solid 2"toolbar (1045 High tensile grade)
- 32 x 10mm Coil Tines

Models

- FA120 - 3' x 6 Tine Single bar
- FA121 - 4' x 8 Tine Double bar



Lawn Rollers

Ideal for general farm use or specifically for turf farms, race clubs, ovals etc.
Trailed models made to order.

Features

- 75 x 50 x 6mm RHS Main Frame
- Heavy Duty linkage
- Round seamless steel tubes, 14" diameter x 1/4" wall thickness
- Can be filled with water for additional weight

Models

Code	Size	Weight empty (kg)	Weight filled (kg)
FA447	3'	90	250
FA448	4'	120	340
FA449	5'	150	420
FA450	6'	180	500
FA451	7'	210	560
FA452	8'	240	670
FA453	9'	270	750
FA454	10'	330	840

Versatility...

Productivity...

Add these to your fork lift.

FA1013 - Drum Lifters and Tipper

FA1012 - Lifting Jib - Heavy Duty

FA1010 AS Safety Cage

Carpet Poles

Extension Fork Slippers

Container ramps

THE ULTIMATE CHOICE

WIX
FILTERS

**HEAVY
DUTY FILTRATION**

Farm Supply Machinery & Equipment is the distributor of WIX FILTERS – covering oil, fuel, hydraulic, coolant, transmission and air filters for all machines and vehicles.

WIX heavy duty filters can stand up to whatever the industry demands. Testing and benchmarking continues to prove this. WIX's heavy duty filtration engineers have over 125 years of combined experience and dozens of U.S. patents. That's why WIX is the global leader in heavy duty filtration.



Oil Filters

Oil is the lifeblood of all vehicles, and this holds particularly true of on- and off-road heavy duty equipment. Many operators spend hours deciding what oil they are going to use and tend to take their oil filtration for granted, however this small and inexpensive portion of their overall system plays a vital role in protecting engines from premature wear and potential failure.

We make it easy. Choose WIX heavy duty oil filters and rest assured that their commitment to continued research and development has taken all the guesswork out of choosing the right filter for your fleet, agricultural or off-road application. And if there's any doubt, just look at all the technology that's inside.

Air Filters

Why choose WIX heavy duty air filters over competitive filters? Because WIX has done its homework when it comes to air filtration. It takes only eight ounces of dirt to destroy a heavy duty engine. The typical off-road vehicle is exposed to 1 ½ to 2 ½ tons of airborne dirt each year, meaning first-rate air filtration is critical to the life of the engine. That's why WIX heavy duty air filters are designed to take that protection to new levels.

Coolant Filters

Fifty-three percent of all catastrophic, premature engine failures are directly related to improper cooling system maintenance techniques and habits. Using the correct water, antifreeze and supplemental coolant additives in cooling systems is more critical than ever to insure trouble-free service life. Heavy Duty cooling system manufacturer's maintenance recommendations, maintenance techniques and filtration product availability have dramatically changed over the past several years. WIX has been very successful in keeping pace with the changes that directly affect their coolant-filtration products and the cooling system additives we offer.

Fuel Filters

No matter what size or horsepower rating your engine is, the fuel that powers it can be filled with contaminants like dirt, rust, scale, algae and of course, water. This contamination can rob your engine of power and even cause fuel system failures. Wix offers high-quality, high-efficiency fuel filters and a complete line of fuel / water separators for your whole fleet.

Hydraulic Filters

Fluid power applications are growing at a very rapid rate. WIX is constantly researching these applications and adding new products to meet our customer's needs. WIX's newest product offering is a line of industrial hydraulic filters. Whether your fluid-power filtration needs are for mobile or industrial applications, Farm Supply Machinery & Equipment is your source for hydraulic filters.

Heavy Duty Transmission Filters

Whether the filter is cartridge style or spin-on style, WIX fluid-power filters utilize heavy-gauge steel componentry that is tin plated to resist corrosion. WIX filter's centre tubes are spiral-wound for consistent internal structural integrity. The base plates of WIX spin-on filters contain optimized inlet-hole geometry and rolled, internal threads for strength and easy installation. Our customers can be assured that when they purchase a WIX brand fluid-power filter, the media used in the filter is specifically designed for the application, and it will perform to their expectations. Complete media performance information, as prescribed by current SAE/ISO Beta Ratio testing methods, is either on the filter itself or available on request.



WIX. WHERE IT COUNTS.™



425 Solo Backpack Sprayer
15L Piston



416 Solo Motorised
Backpack Sprayer 20L 12volt



RC-18 Knapsack Condor 18L



I57 Solo 75L Fill Capacity



430-0300E Squatpak RED -
WATER / SPRAYING TANK - 300 L



410-49 SPRAY GUN -
TRIAM 49



RP70-S3 Rakpak 70L 12 Volt
Sprayer



181 HOSE REEL -
ECONOMY - BARE



KBC400 ECONOPAK
LINKAGE SPRAYER



STF800-s TRAILED FIRE
FIGHTING UNIT



SQD1000-6 DieselPak -
Diesel Tank - 1000 LT



PF11 Diesel Counter
Meter - Diesel Digital
Piusi K24



382-036 12 volt Hi-Flow
DieselPower Pump



SQDH300-X1 320 Litre
Diesel HD



MDTP2520 twin pedestal
metal hose reels - diesel



PF14 Diesel Meters - 4 Digital
Mechanical PIUSI K44



Lifting Jib

Features

- Lifting capacity up to 1000kg
- Standard and Heavy Duty
- Cat 2 or 3

Model

FA1011 - Standard lifting Jib

FA1012 - Heavy duty lifting Jib



Spreader Trailer


Trailer only, does not include fertiliser spreader.

Features

- 2000kg capacity
- Galvanised
- Offroad wheels and tyres
- Suits most large spreaders
- Custom made to suit your requirements

Model

FA870

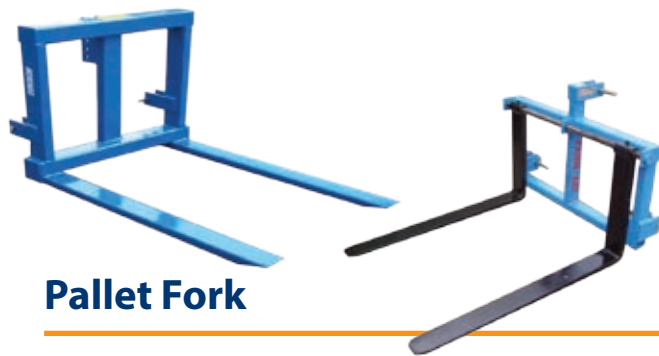

Pallet Fork

Features

- 3pty linkage
- 750kg capacity
- 75 x 50 x 6mm RHS forks - 1200mm long
- Fully adjustable fork width
- Lift as high as your linkage allows
- Weight 98kg

Model

FA600 - Heavy duty 3PL pallet fork c/w adjustable tines

Pipe Layer Attachment


Features

- 100 mm ID
- Suits standard & Heavy Duty Ripper
- Accommodates up to 3" / 90mm OD pipe

Model

FA100 - suits Berends Standard and Heavy duty rippers (90mm OD pipe)

FA101 - suits Berends Compact ripper (65mm OD pipe)

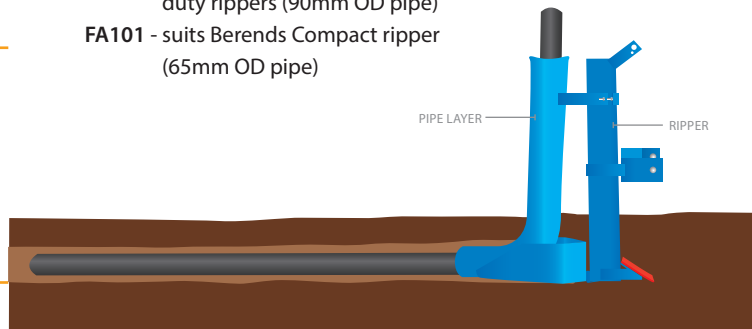



Rear End Loader & Linkage Scoop

The Linkage scoop can be operated backwards and has a lifting height of 600mm. The scoop is ideal for moving materials about and has a range of top link mounting points to vary the angle of attack on the bucket. The trip can be operated from the tractor seat. Suggested tractor horsepower is 18-70HP.

Features

- Shift and load soil, gravel, manure etc.
- Rounded bucket
- High Lift, bucket clears 1.8m when released
- Quick release, trips from most tractor seats
- 1/2 yard, 0.3m³ capacity
- Long arm
- Linkage scoop 1180 x 610 x 460mm
- Linkage scoop Weight approx 80kg
- Rear end loader Weight approx 185kg

Model

FA400 - 1/2 yard capacity, 1.6m boom length, 1.35m max lift height

FA401 - 1/2 yard capacity, 2m boom length, 1.8m max lift height



CAT TRAP



POSSUM TRAP



RODENT TRAP



TURKEY TRAP



Animal Traps

For trapping feral cats, possums, rodents and turkeys. Large range of pest control available. Traps are manufactured in Australia to RSPCA and Legislation approval "JAW" traps.

Models

Cage traps

Code	Size	Size (mm)
TWCM	Mouse	180 x 105 x 70
TWCB	Bird	450 x 160 x 160
TWCR	Rodent	450 x 160 x 160
TWCRP	Rodent w/ plate	450 x 160 x 160
TWCRA	Rabbit	640 x 180 x 180
TWC	Cat	600 x 300 x 300
TWCP	Possum	600 x 300 x 300
TWCT	Turkey	700 x 300 x 400

Jaw traps

D1 1/2	Rabbit & Ferral Cat	600g
D4COIL	Dingo & Fox	1.2kg
TRAPS	Dingo & Wild dog	2.5kg






Stick Rake

Features

- Heavy duty 75 x 75 angle bottom linkage mounts
- 75 x 50 RHS Main frame
- Double frame added for added strength
- Anti-kick bar fitted for greater strength, greater production for tines and minimise tine breakage
- $\frac{3}{4}$ " or 1" special spring steel round curved tines
- Tines spaced 6" apart – other spacings available on request
- Tines float independantly - approx 90mm max vertical movement
- Rakes sit higher, approx 650mm clearance allowing more debris to be collected.

Models

FA199 - 3' Stick Rake
FA200 - 4' Stick Rake
FA201 - 6' Stick Rake
FA205 - 7' Stick Rake
FA202 - 8' Stick Rake
FA203 - 10' Stick Rake
FA204 - 12' Stick Rake

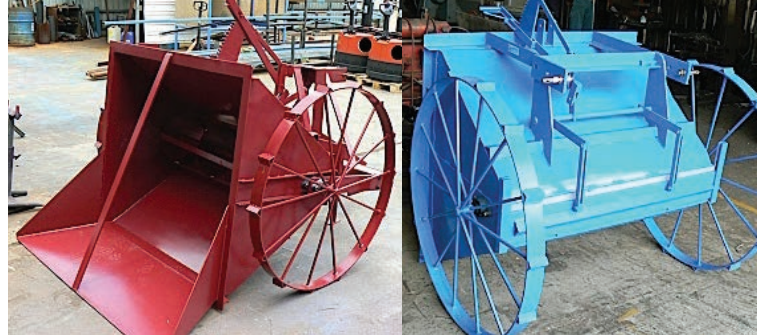

Fowl Manure & Gypsum Dropper - Self Loading model

Features

- 3pt Linkage with Wheels for ground drive
- Agitator specially designed to handle wet, dry, thick or thin fowl manure
- Tips to allow implement to scoop manure or gypsum from the ground efficiently
- Supplied with Hydraulic ram and hoses to connect to existing breakaway couplings
- Manufactured to order in 1 Yard hopper size (approx. volume)

Models

FA1102 - 1 Yard (approx 1m³)

- Standard model

Features

- 3pt Linkage with Wheels for ground drive
- Agitator specially designed to handle wet, dry, thick or thin fowl manure
- Manufactured to order in 1 Yard or 2 Yard hopper size

Models

FA1100 - 1 Yard (approx 1m³)
FA1101 - 2 Yard (approx 1 1/2m³)



ROP Frames



Canopies



Seating



Filters & Fuel Lines



PTO Driveline



Agricultural Gearboxes



Hydraulics



Exhaust



Tie Rod Ends By Size



Earth Engaging Tools



Special Implement Parts



Lighting



Reinforced Rubber Curtain



Linch Pins



Top Hitch Pins



Hydraulic Top Links



FARM-AID

	Imperial to Metric		Metric to Imperial	
Area	1 in ² (square inch)	6.45cm ²	1cm ²	0.155 in ²
	1 ft ²	929cm ²	1m ²	10.8 ft ²
	1 yd ²	0.836m ²	1m ²	1.2 yd ²
	1 p (perch)	25.3m ²	1m ²	0.0395 p
	1 rd (rood)	0.101ha (hectare)	1ha	9.88 rd
	1 acre	0.4hectare	1ha	2.47ac
	1 square mile	2.59km ²	1 km ² (100 Hectare)	247ac
Speed/Velocity	1mph (mile per hour)	1.61 km/h	1 km/hr	0.62 miles/hr
	1kn (knot)	1.8 km/h	100 km/hr	62 miles/hr
Length	1 inch	25.4mm	1cm	0.394"
	1 foot	30.5cm	1m	3.28'
	1 yard	0.914m	1m	1.09 yd
	1 fur (furlong)	201m	1km	4.97 fur
	1 mile	1.61km	1km	0.62 mile
Volume	1 fl oz (fluid ounce)	28.4ml	1ml	0.0352 fl oz
	1 pt (pint)	568ml	1L	1.7 pt
	1 gal (gallon)	4.55L	1m ³	220 gal
	1 acre foot	1230 m ³ (1.23 megalitres (Ml))	1Ml	0.811 acre foot
Temperature	75°F	24°C	100°C	212°F
Weight/Mass	1oz (ounce)	28.35g (grams)	1g	.03527 oz
	1lb (pounds)	454g	1kg	2.2lb
	1 stone (14lb)	6.35kg	1kg	0.157 stone
	1ton	1.02t (tonne)	1tonne (1000kg)	0.98 long ton
Power	1hp (horsepower)	0.746 kW (kilowatt)	1kW	1.34 hp

All products and specifications are correct at time of print, but due to product improvement or availability may be subject to change without notice.

Dealer/Distributed by: