



AgriPOWER **Silvan**
Farm Machinery

Slasher PRODUCT GUIDE



silvan.com.au

Silvan Slashers

With over 50 years of experience in the agricultural industry, Silvan Australia produce a range of the most reliable slashing equipment ever made in Australia.


Renowned for their reliable and robust construction, Silvan slashers are one of the few remaining Australian owned, operated and assembled slasher lines. They are designed and manufactured to the highest specifications, with the range and performance capabilities to easily match acreage, tractor horsepower or intensity of use.

A dedicated team of machine operators, welders, fabricators, spray painters in addition to administration and engineering support staff make certain the highest level of quality is met. From slasher components that are laser cut for exact fitment, rugged rotor combinations for increased life, and performance based drivelines built to ISO standard specifications, you can be assured our focus is on producing a range of superior quality products.

The slasher range includes standard to medium duty slashers ideal for general farm use, cutting and clearing. Silvan's heavy duty models are well suited to large scale farms and contractors for clearing tough growth.

For further strength and reliability, slasher top decks incorporate extra gusseting with three-quarters of the Silvan slasher range having at least a 5mm thick top deck. All blades are made from tough boron steel, with the heavy duty blades featuring a stepped design for maximum rotor protection. Skids have height adjustment holes to cater for varying cutting heights and eliminate unexpected height movement.

With over 200 dedicated Silvan machinery dealers around Australia, support is always available. Silvan, built in Australia, by Australians, for Australians.

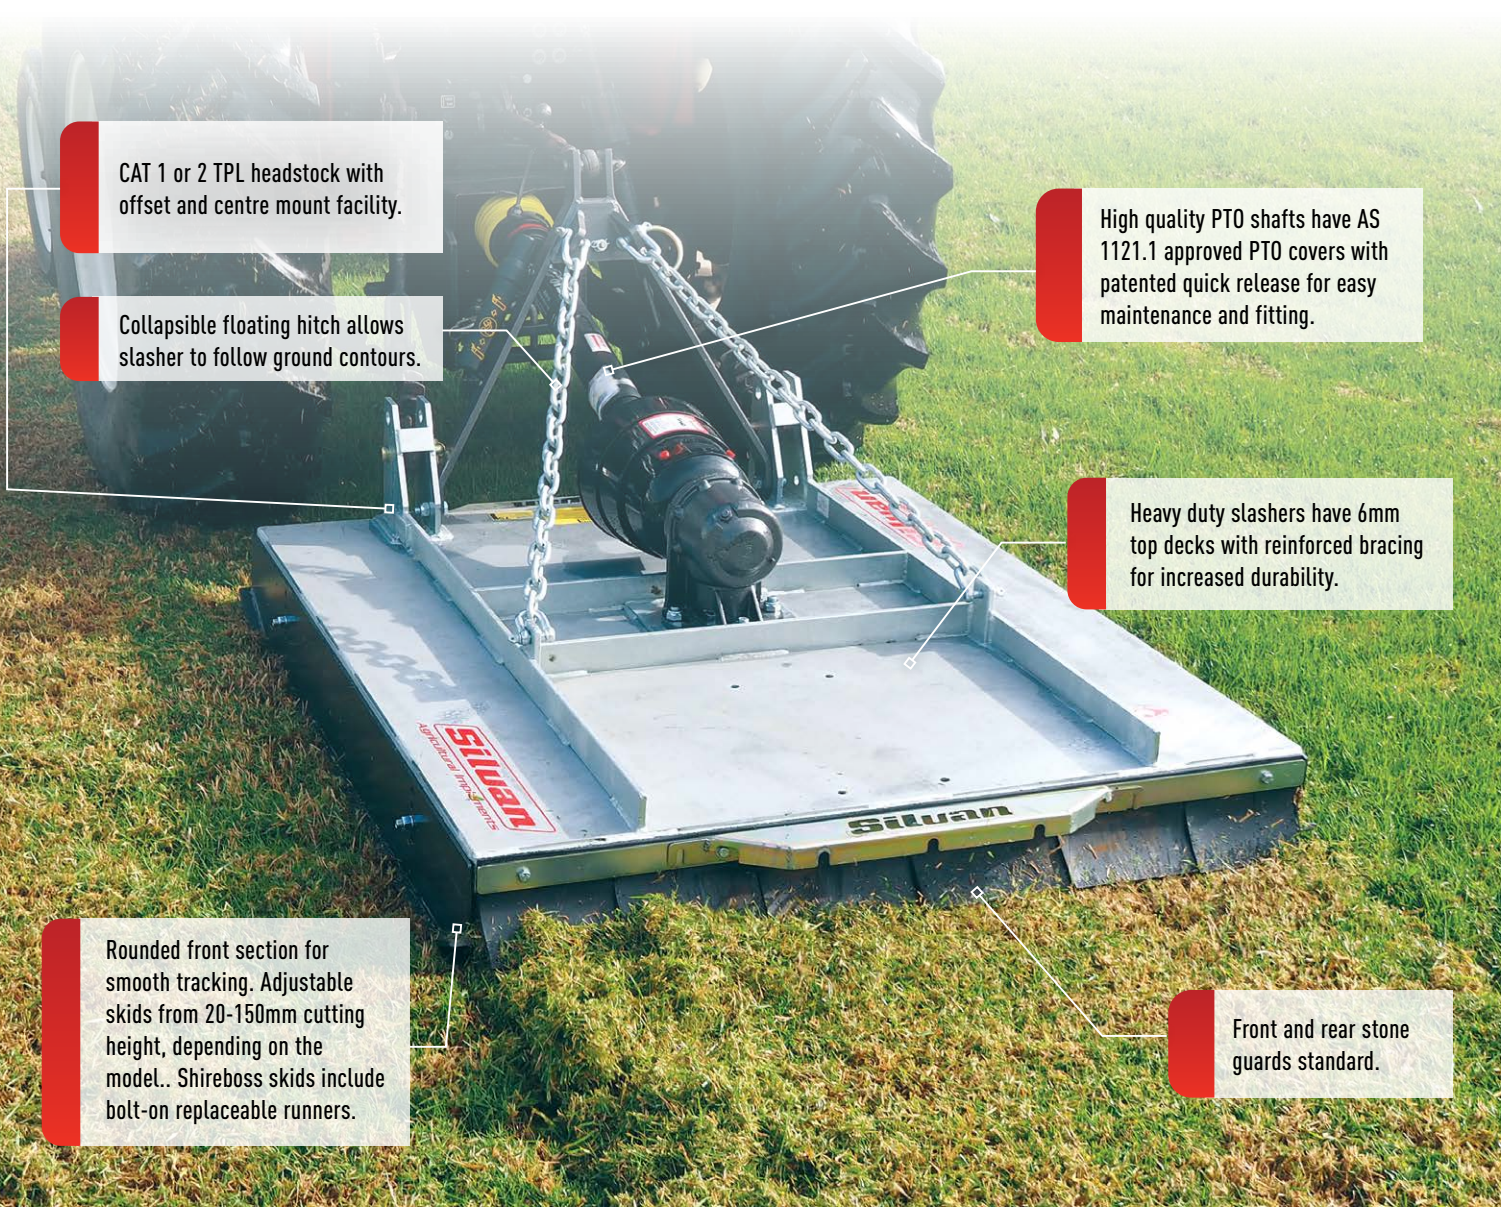

CAT 1 or 2 TPL headstock with offset and centre mount facility.

Collapsible floating hitch allows slasher to follow ground contours.

High quality PTO shafts have AS 1121.1 approved PTO covers with patented quick release for easy maintenance and fitting.

Heavy duty slashers have 6mm top decks with reinforced bracing for increased durability.


Rounded front section for smooth tracking. Adjustable skids from 20-150mm cutting height, depending on the model.. Shireboss skids include bolt-on replaceable runners.

Front and rear stone guards standard.

Slasher Features


SLASHER DRIVELINES

Silvan use only performance based drivelines built to ISO standards, ensuring robust and reliable operation. Individual components from the cast iron housing to bearing and gears have been precision engineered. Gearboxes start at 40 hp and are matched to Silvan's general purpose slashers. The 75 hp heavy duty series is the most popular, while the gutsy 100 and 130 hp gearboxes are purpose built for extra heavy duty slashing requirements.

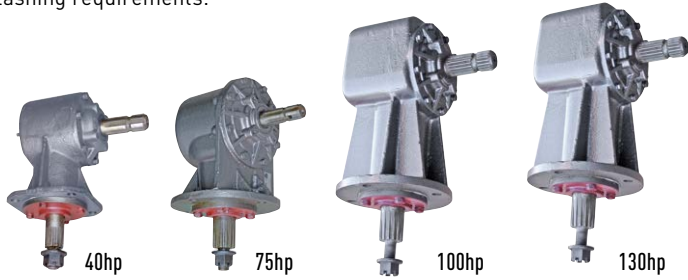

Gears are submersed in an oil bath with gear case porting for oil flow to the lower bearings

Forged, precision cut gears give years of working life



Alloy steel shafts for increased strength and durability

Robust ductile iron housing with precision cast iron caps


Primed in red oxide with enamel hammer tone top coat

Roller bearings for light duty gearboxes. Medium and heavy duty gearboxes have tapered roller bearings for increased thrust support

Mechanical seals and triple lipped spring loaded seals for maximum protection

SLASHER ROTORS AND BLADES

All rotors incorporate three leaf beams for durability and strength. The steel rotors are welded together while the spring steel rotors are bolted together for extra strength. Blades come in two profiles: the standard step down blade or the heavy duty step down and twist blade.

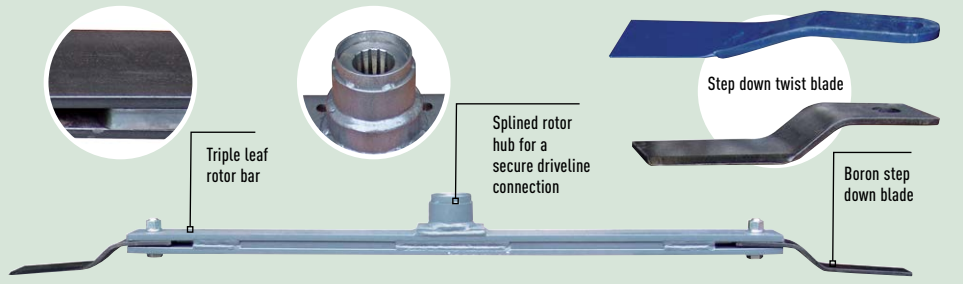

SLASHER FEATURES



Heavy duty slashers incorporate 6mm top decks with reinforced bracing for increased life and strength



Slasher components are laser or high definition plasma cut to ensure accuracy and exact fitting




All slasher skids are height adjustable with separate holes to avoid slippage. Shireboss skids include replaceable runners



An access key hole on the Shireboss deck makes easy blade bolt removal



Constant velocity PTO shafts have AS 1121.1 approved PTO covers with patented quick release for easy maintenance and fitting

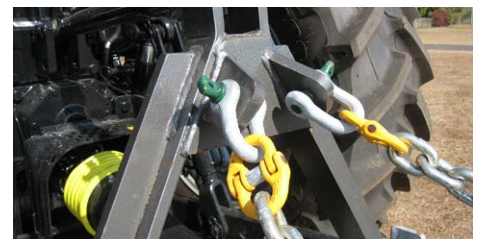

Rated lifting chains on the Shireboss attach to a gusseted head stock

General Purpose Slasher



GENERAL PURPOSE SLASHER

Ideally suited to clearing paddocks, fields and private roadsides where general cutting is required with a low hp tractor.

- Cutting widths: 1070mm (3'6"), 1200mm (4'), 1350mm (4'6"), 1500mm (5')
- Floating Cat I dual mount hitch with centre and offset capability
- Australian approved PTO shaft with adjustable friction clutch
- Smooth folded 3mm top deck with gusseted understructure
- Premium quality powder coat finish
- Adjustable skids from 50 - 90mm cutting height. Features separate adjustment holes to avoid slippage
- 100mm triple leaf beam with tough boron step down blades
- Front and rear rubber stoneguards
- Optional height control wheel

40HP



MODEL	WORKING WIDTH	OVERALL WIDTH	OFFSET	CUTTING HEIGHT	PTO	OVERALL HEIGHT	WEIGHT
	mm	mm	mm	mm	RPM	mm	KG
102RS36	1070 (3'6")	1135 (3'9")	150	50-90	540	960	151
102RS4	1200 (4')	1310 (4'3")					181
102RS46	1350 (4'6")	1420 (4'8")					211
102RS5	1500 (5')	1590 (5'3")					258

Medium Duty Slasher



MEDIUM DUTY SLASHER

A compact mid-range slasher that is tough and versatile; ideal for general farm use.

- Cutting widths - 1473mm (4'10"), 1778mm (5'10")
- Floating Cat I or II hitch dual mount with centre and offset capability
- Australian approved PTO with adjustable friction clutch
- Smooth folded 5mm top deck with gusseted understructure
- Long lasting hot dip galvanised top deck
- Adjustable skids from 20 - 80mm cutting height.
Features separate adjustment holes to avoid slippage
- 100mm triple leaf beam with heat treated step down twist blades
- Front and rear chain guards
- Optional height control wheel



75HP

MODEL	WORKING WIDTH	OVERALL WIDTH	OFFSET	CUTTING HEIGHT	PTO	OVERALL HEIGHT	WEIGHT
	mm	mm	mm	mm	RPM	mm	KG
108RS5	1473 (4'10")	1600 (5'3")	200	20-80	540	990	360
108RS6	1778 (5'10")	1905 (6'3")					397


Heavy Duty Slasher



HEAVY DUTY SLASHER

Suited to large acreage applications including field clearance, firebreaks, private roadsides or where major cutting and clearing is required.

- Cutting widths - 1500mm (5'), 1800mm (6'), 2100mm (7')
- Floating Cat II hitch as a centre mount model or offset model
- Australian approved PTO with adjustable friction clutch
- Standard model with 75hp gearbox or Premium model with 100hp gearbox
- Gusseted heavy duty 6mm top deck
- Long lasting hot dip galvanised finish
- Adjustable skids from 50 - 150mm cutting height. Features separate adjustment holes to avoid slippage
- 100mm triple leaf beam with tough boron step down blades on standard model and spring steel rotor bar for extra strength on premium model
- Front and rear rubber stoneguards on standard model and chain guards on premium model
- Optional height control wheel - choice of standard or heavy duty (pictured right) wheels

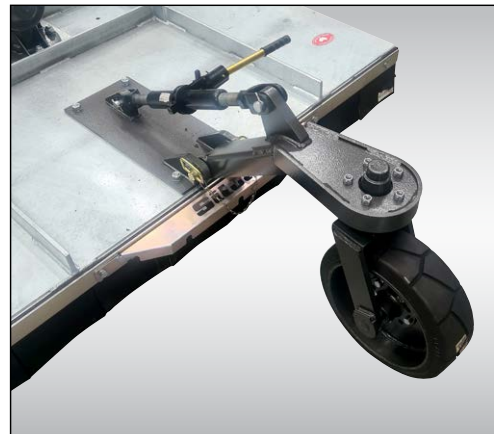

75HP

100HP

MODEL	WORKING WIDTH	OVERALL WIDTH	OFFSET	CUTTING HEIGHT	PTO	OVERALL HEIGHT	WEIGHT
	mm	mm	mm	mm	RPM	mm	KG
131RS5G	5' (1500)	5'3" (1600)	CENTRAL	50 - 150	540	1020	347
131RS6G	6' (1800)	6'3" (1900)					469
131RS7G	7' (2100)	7'3" (2200)					572
131RS5G100SSC	5' (1500)	5'3" (1600)					376
131RS6G100SSC	6' (1800)	6'3" (1900)					471
131RS7G100SSC	7' (2100)	7'3" (2200)					574

Shireboss Extra Heavy Duty Slasher




SHIREBOSS EHD SLASHER

The Shireboss slasher with reinforced subframe and sides is used for clearing heavy scrub, creating firebreaks, roadsides, council contract work and where all types of cutting and clearing is required.

- Cutting widths - 1800mm (6'), 2100mm (7')
- Cat II centre attachment with reinforced collapsible floating hitch, rated lifting chains and hammerlock shackles
- Australian approved PTO with star profile tubing, removable camlock cover for easy greasing and adjustable friction clutch
- Gusseted heavy duty 6mm top deck with rear corners tapered for improved manoeuvrability
- Long lasting hot dip galvanised top deck
- Adjustable skids from 40 - 140mm cutting height with replaceable skid runners
- Tough triple leaf, spring steel rotor bar with heat treated step down twist blades protecting beam and gearbox from rough conditions
- Front and rear quickfit chain guards
- Optional height control wheel

130HP

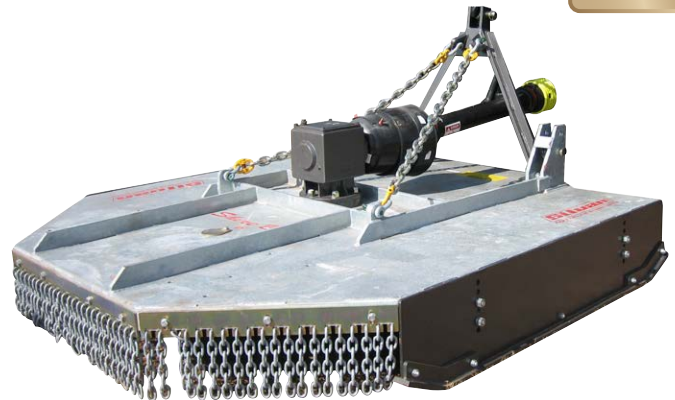

MODEL	WORKING WIDTH	OVERALL WIDTH	OFFSET	CUTTING HEIGHT	PTO	OVERALL HEIGHT	WEIGHT
	mm	mm	mm	mm	RPM	mm	KG
145SB6HBG130	1800 (6')	1970 (6'6")	CENTRAL	40 - 140	540	1140	648
145SB7HBG130	2100 (7')	2270 (7'6")					790

Silvan

AgriPOWER

Farm Machinery

Slasher

PRODUCT GUIDE



The company reserves the right to change recommended prices and specifications without notice. All items in this catalogue have been included in good faith on the basis that the goods described were available at the time this catalogue was published. Failure of suppliers to deliver in accordance with samples, descriptions, or at all, or other unintentional causes may result in some lines being unavailable. Space may prevent some dealers from stocking all items. All brand names and product names used in this publication are trade names, registered trade marks, or pending trade marks of their respective owners.

SILVAN AUSTRALIA PTY. LTD.
ABN 48 099 851 144
Freecall: 1300 745 826 Fax: 1800 745 826
Email: info@silvanaust.com
Web: silvan.com.au

Head Office: 68 Atlantic Drive,
Keysborough, Victoria, Australia 3173

QLD. Office: Warehouse 2, 30 Gow Street,
Moorooka, Queensland 4105

W.A. Office: 12 Cressall Road, Balcatta, WA 6021

COPYRIGHT © SILVAN AUSTRALIA PTY. LTD. 2021

YOUR LOCAL SILVAN DEALER

