

***THE RAMP REVOLUTION
IS HERE***



EZI-LOADA



DIGGA RAMPS IT UP

A light weight ramp, with enhanced safety, that delivers on quality, performance and is cost effective.

European designed and engineered, the new Digga Ezi Loada ramps are the most advanced design on the Australian market today.

NEW FEATURES

- 3 different connection options
- Enhanced rail strength
- Patented, extruded, double T rail with interlocking rung design
- Superior strength & durability

18 MONTH

★STANDARD WARRANTY★

ATTACHING RAMPS

PIN:
Inserted through ramp and tray.




TONGUE:
Fits between truck bed and tail gate.



CHAIN:
Chain ramp to truck or other structure.

Patented, fully extruded, double T-beam design, interlocks the rungs into the body of the rail. No physical load is taken by the weld alone. The welds (top & bottom), hold the rung in its fitted position, adding superior strength & durability.




Reinforced, easy load, lead on/off design are safer and more durable than conventional ramp designs.

TOP



BOTTOM



The reinforced bottom rung sits low to the ground ensuring machines don't have to 'step up' onto the ramp. As a result the bottom few rungs won't bend, as so often is the case with current ramp designs.

NEW



OLD



STANDARD RANGE

RUBBER WHEELS & RUBBER TRACKS - 1.5T TO 6.2T

- Rung design prevents clogging up with mud, stones & other debris reducing risk of tyre/track slippage.
- New rung design cleans the wheels/tracks as the machine climbs the ramp, minimizing debris taken onto the truck bed.
- Rung Design allows the operator to safely walk up the ramp.
- Smoothest ride of any ramp on the market.





UNIVERSAL RANGE

ALL MACHINES WHEELED, STEEL & RUBBER TRACKS - 6.2T TO 9T

The first dual purpose ramp available for rubber/steel tracked machines as well as wheeled machines.

- Patented, studded rungs minimise slip or loss of grip during the loading/unloading activity.
- Rungs are level with the top of the main supporting rail minimising wear & providing greater durability.
- Superior strength, versatility and safety.

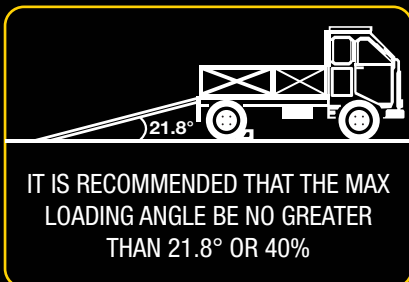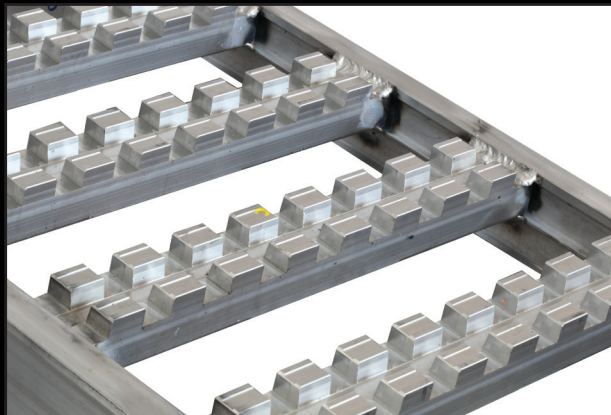

CERTIFIED TO THE HIGHEST INTERNATIONAL STANDARDS
GUARANTEEING THE QUALITY AND SAFETY OF THE RAMPS




ATTACHING RAMPS

Situations change and often ramps are used on multiple vehicles or in different situations. Traditionally ramps can only be secured using a pin, Digga Ezi Loada ramps give you 3 methods.


1. PIN METHOD

The ramp is lined up with the holes that are on the edge of the tray. Once aligned, a pin is inserted through ramp and tray to lock it in to place. The ramp is then secured by inserting an R Clip through the pin.

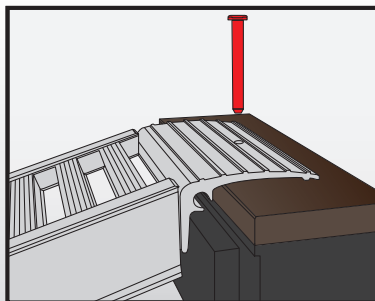


2. TONGUE METHOD

The tongue is placed between the truck bed and the tail gate. The shape of it will not allow the ramps to "pop" out of the gap while the machine is on the ramp.

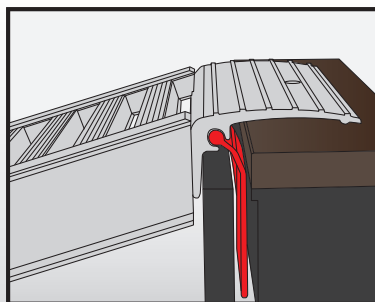

3. CHAIN METHOD

A chain and shackle can be fitted to the weldment underneath the ramp then connected to the tail gate bar underneath the truck- chain not supplied (Note, this is a secondary attachment method and should not be used without a pin or tongue)

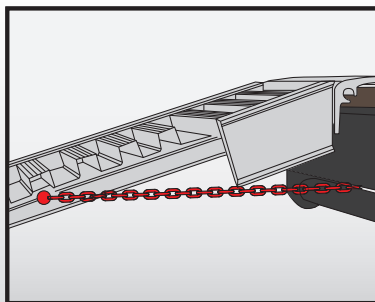

CHOOSING YOUR RAMP

WHEN SELECTING THE CORRECT RAMP FOR YOUR TRUCK AND MACHINES YOU WILL NEED THE FOLLOWING INFORMATION.

1. YOUR TRUCK DECK HEIGHT - Ensure your deck height doesn't exceed the max height quoted in the tables below (C)
2. TRACK / WHEEL WIDTH - Compare with the internal width below (B) to make sure the ramp is suitable for your machine.
3. TRACK / WHEEL TYPE - Use the top table for rubber track and rubber wheeled machines and use the bottom table for rubber wheeled, and steel / rubber track machines.
4. MACHINE WEIGHT - Using the first column (A) select a ramp which exceeds your machine's mass including the bucket if fitted to the machine during loading and unloading.

SPECIFICATIONS




RUBBER WHEELS & TRACKS

Capacity @ Wheelbase (A)	Code	Beam	Int Width (B)	Ext Width	Weight Per Ramp	Length	Max Deck Height (C)
1.5t @ 1m	LR152530	64mm	255mm	300mm	14kg	2500mm	987mm
2.0t @ 1m	LR233030	100mm	300mm	360mm	23kg	3000mm	1076mm
3.0t @ 1.5m	LR303030	115mm	300mm	360mm	26kg	3000mm	1076mm
3.0t @ 1.5m	LR303535	120mm	350mm	410mm	36kg	3500mm	1258mm
3.5t @ 1.5m	LR353535	125mm	350mm	410mm	37kg	3500mm	1258mm
4.0t @ 1.5m	LR403545	140mm	450mm	510mm	46kg	3500mm	1258mm
4.7t @ 1.5m	LR473545	155mm	450mm	510mm	46kg	3500mm	1258mm
4.7t @ 1.5m	LR473550	165mm	500mm	560mm	51kg	3500mm	1258mm
5.9t @ 1.5m	LR593545	150mm	450mm	510mm	53kg	3500mm	1258mm

STEEL TRACKS / RUBBER WHEELS & TRACKS

Capacity @ Wheelbase	Code	Beam	Int Width	Ext Width	Weight Per Ramp	Length	Max Deck Height
6.2t @ 2.0m	LRU593550	150mm	500mm	560mm	60kg	3500mm	1258mm
7.0t @ 2.0m	LRU663550	170mm	500mm	560mm	61kg	3500mm	1258mm
9.0t @ 2.0m	LRU823550	180mm	500mm	560mm	65kg	3500mm	1258mm

PRODUCT SHOWCASE

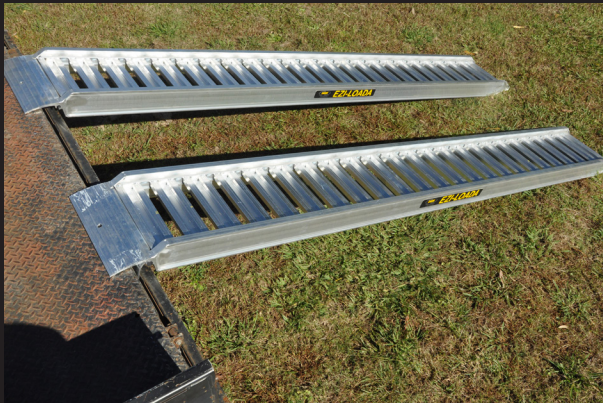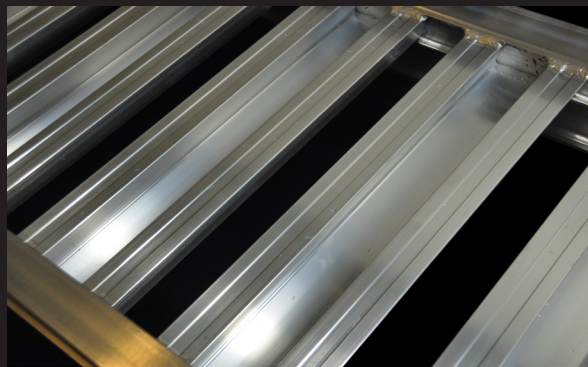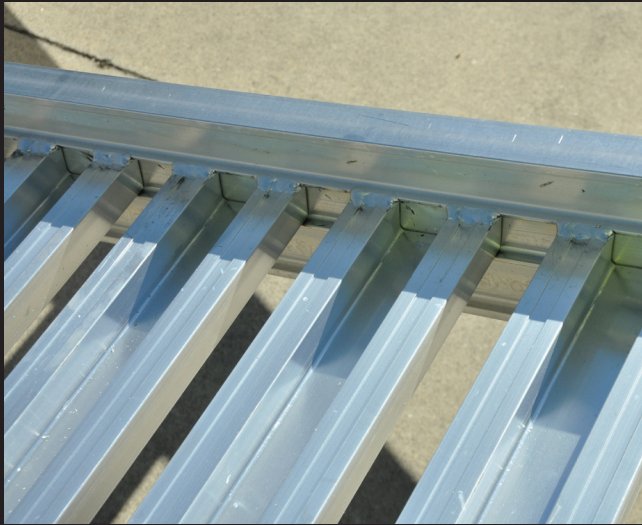



DIGGA AUSTRALIA

4 OCTAL STREET
YATALA QLD 4207
AUSTRALIA

PH: (07) 3807 3330
EMAIL: INFO@DIGGA.COM

WWW.DIGGA.COM

PH: 1300 2 DIGGA

FOR FURTHER INFORMATION PLEASE CONTACT YOUR LOCAL AUTHORISED DIGGA DEALER

QLD / NT

Email: info@digga.com

NSW / ACT

Email: nsw@digga.com

VIC / SA / TAS

Email: vic@digga.com

WA

Email: diggawest@bigpond.com

Digga NZ Pty Ltd

Ph: +64 9262 3500

Email: sales@digga.co.nz



IMPORTANT: The attachments shown in this brochure are for illustrative purposes only and may include some non-standard optional extras. All specifications should be regarded as approximate only. For full details contact your Digga Dealer. In the interest of product improvement, Digga reserves the right to change these specifications without prior notice.